


# Freedom Remote Control Panel

## Battery Status and Freedom Inverter/Charger Remote Control

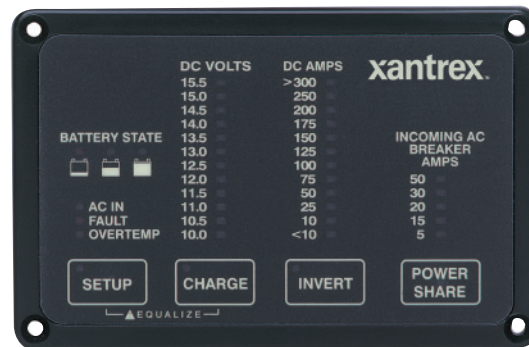

### Provides Valuable Inverter/Charger System Monitoring and Control

The Freedom Remote Control Panel allows you to control your Freedom Combi, Freedom 458 and Freedom Marine Series Inverter/Charger system from any convenient location. It is easy to read, operate and install, and all controls can be accessed directly from the front panel.

#### Product Features

- ▶ Independent invert and charge on/off controls
- ▶ Push button control of power sharing, equalizing, battery set-up
- ▶ Multi-colored LED displays battery state of charge, fault conditions, AC input, DC voltage and DC amperage
- ▶ LED warning indicators for low battery and overload warning
- ▶ Splash resistant design
- ▶ Incoming AC breaker selection allows programmable power sharing
- ▶ Easy to install
- ▶ 30 month warranty

Note: The 24-volt models of Freedom Combi inverterchargers require a different Freedom Remote.

#### Specifications

<b>Voltage bar graph</b>	10.0 – 15.5 VDC
<b>DC amps bar graph</b>	Idle mode = off Loaded = <10 – 300 DC amps
<b>Operating temperature range</b>	0 – 70°C
<b>Compatible battery types</b>	wet/gel/AGM
<b>Design</b>	Splash resistant
<b>Dimensions: (L x W x D)</b>	5.75 x 3.75 x 1.75" (146 X 95 X 25 mm)
<b>Cutout size: (W x H)</b>	4.875 x 2.875" (116 X 73 mm)
<b>Weight</b>	3 oz (85 g)
<b>Warranty</b>	30 months
<b>Part number</b>	84-2056-01

Note: Specifications subject to change without notice.

### Xantrex Technology Inc.

Headquarters  
8999 Nelson Way  
Burnaby, British Columbia  
Canada V5A 4B5  
800 670 0707 Toll Free  
604 420 1591 Fax

5916 195th Northeast  
Arlington, Washington  
USA 98223  
800 446 6180 Toll Free  
360 925 5144 Fax